

'STW' Industrial Convactor Heater

The EXHEAT STW range of air warmers has been designed for environments where heavy-duty natural convactor type heaters are required. The unit can include optional integral externally adjustable limit thermostat, remote thermostatic control or frost protection control as required.




FEATURES

- Heavy duty robust construction.
- Suitable for floor or wall mounting.
- Powder coated sheet steel construction.
- Supplied with plugged cable entries
- Weatherproof protected to IP66 against water and dust.
- Optional adjustable 0-40°C room temperature controlled thermostat.

TYPICAL APPLICATIONS

- Workshops
- Crane cabs
- Dairies
- Ships
- Storage units
- Greenhouses
- Pump Stations
- Equipment Rooms
- Frost Protection

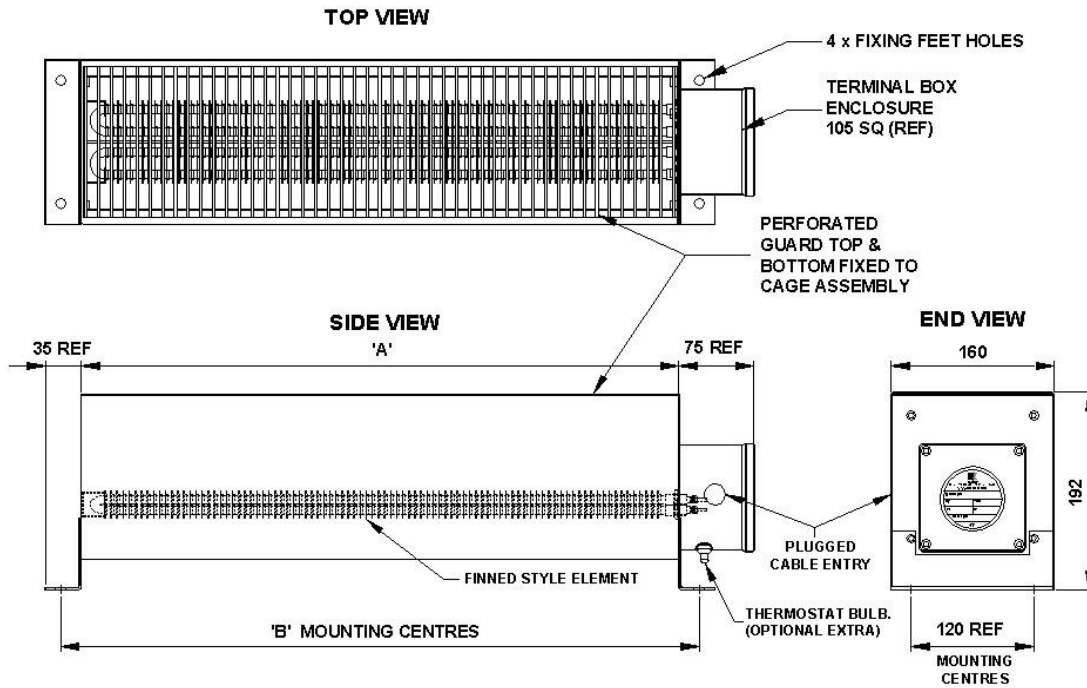

Model	Stock No	Rating (W)	Supply (V)	Dimensions (mm)			Weight (kg)
				'A'	'B'	Overall	
STW 1000	S62 01 01 00	1000	110 or 240	500	540	610	6.6
STW 2000	S62 01 02 00	2000	110 or 240	1000	1040	1110	14.5
STW 3000	S62 01 03 00	3000	110 or 240	1500	1540	1610	20
STW 1000T	S62 01 01 00-T	1000	110 or 240	500	540	610	6.6
STW 2000T	S62 01 02 00-T	2000	110 or 240	1000	1040	1110	14.5
STW 3000T	S62 01 03 00-T	3000	110 or 240	1500	1540	1610	20

- Construction** Powder Coated sheet metal construction.
- Terminal Box** Powder Coated Die Cast Aluminium, weatherproof to IP66.
- Element** Finned plated mild steel.
- Supply** Standard heaters are to suit 110v/240v.
- Mounting** Support feet are pre-drilled and suitable for floor mounting or wall mounting. Heaters should not be covered and always mounted horizontally.
- Rating** 1kW, 2kW and 3kW ratings available.
- Installation** Electrical installation should be carried out by a qualified electrician to meet prevailing regulatory requirements.